



- ▶ Extends two or more USB2.0 and USB1.1 devices up to 330ft (100m) over CATx cable
- ▶ Supports USB devices at speeds up to 480Mbps
- ▶ Power required at transmitter end only
- ▶ Add a powered-USB hub to increase the number of remote USB devices supported
- ▶ Robust ESD/EFT immunity for industrial environments
- ▶ Uses a single solid-core CATx cable

Features and Benefits

- Extends full speed USB 1.1 up to 330 feet (100 meters) over CATx cable at speed up to 480Mbps
- Supports High speed USB 2.0 (480Mbps), full speed USB 2.0 and 1.1 (12Mbps), and low speed USB 1.1 (1.5 Mbps)
- Uses a single external 24V 1A DC power supply, connected at either the transmitter or receiver end
- Uses standard solid core CAT5e or better cable, including shielded twisted pair cable
- Supports USB1.1 and 2.0 hosts as well as USB3.0 host controllers and devices up to 480Mbps
- Plug and play, no software drivers required
- Supports all major operating systems, including Windows, Mac OS X, Linux
- Receiver unit supplies up to 1 Amp power to each USB port or 1.5 Amps when shared between both USB ports
- Robust ESD and EFT immunity for industrial environments
- Made in North America

Product Overview


The CrystalLink USB2.0 dual-port is a versatile extender system that can be used in many different applications. It is a great way to put your USB devices where they are convenient to the user or to secure the USB host from unwanted access.

The CrystalLink USB2.0 dual-port allows any two USB devices, such as keyboards, mice, touchscreens, disk drives, printers, joysticks, communication devices, and others to be located at distances up to 330 feet (100 meters) from the host computer. Additional USB devices can be connected using up to four self-powered USB hubs.

The CrystalLink USB2.0 dual-port extension system consists of two units, a transmitter and a receiver. The transmitter connects directly to a computer's USB port. The transmitter and receiver are linked via CATx solid core cable and USB peripheral devices are directly connected to the receiver unit.

One external power supply is required for operation of the CrystalLink USB2.0 dual-port extender, located at either the transmitter or receiver end.

Typical Application

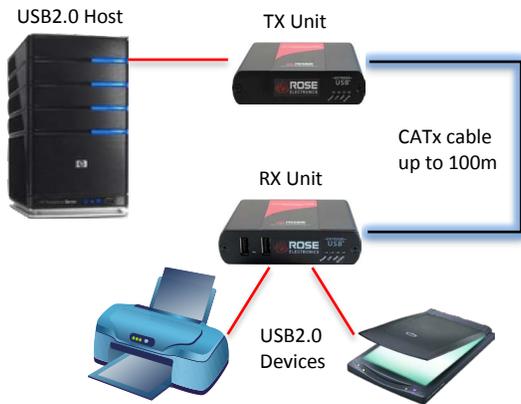

The CrystalLink USB2.0 dual-port is ideal for use in commercial, industrial, residential, medical, data center, and other environments where USB devices need to be connected at distances up to 330 feet (100m) away from a host PC.

Cable requirements The CATx extension cable can be CAT5e, 6, or 7 UTP/STP cable. The CrystalLink USB2.0 dual-port performs best with solid core cable. Stranded (patch) cable and the use of patch panels will reduce the maximum operational distance. STP cable with grounded metal hoods is recommended. Do not use CrystalLink USB2.0 dual-port between buildings or for outdoor extension requirements.

Installation The CrystalLink USB2.0 dual-port extender is simple to install. Apply power to the transmitter and connect it to a free USB port on the host PC. Connect the transmitter and receiver units with CATx cable, and then connect one or two USB devices to the receiver.

Adding USB hubs If you need to connect more than two USB devices to the receiver, simply add one or more self-powered USB hubs. Up to four hubs can be added in a chain, allowing a maximum of 26 total USB devices connected to the receiver.

Operation Display of the USB device recognition and installation process on the monitor indicates a successful installation and the USB devices are ready.

Specifications

Dimensions (W x D x H)	3.4" x 3.0" x 1.0" 87 x 75 x 26 mm
Weight	1.67 lb (0.76 kg)
Power	100-240 VAC 50-60Hz One external adapter, +24V DC, 1A
Receiver current	1 Amp per port or 1.5 Amps total
Distance	Up to 330ft (100 meters)
USB host	EHCI (USB 2.0) and OHCI/UHCI (USB 1.1) USB3.0 host supported at up to 480Mbps
USB hubs	Up to four USB Hubs and 26 devices total
USB speed	High speed USB 2.0 at 480Mbps Full speed USB 1.1 at 12Mbps Low speed USB 1.1 at 1.5Mbps
Connectors	Transmitter: USB host: USB Type B connectors Link: RJ45 jack Receiver: USB device: 2 x Type A connectors Link: RJ45 jack
Link cable	CATx, UTP/STP, EIA/TIA 568A/B CAT 5, 5e, 6, 7, solid core cable preferred
Status LED's	Power (blue), Link (green), Host (green), Activity (amber). Same LED's on TX and RX
Environment	Operating temp: 32°F – 122°F (0°C – 50°C) Storage temp: -4°F – 158°F (-20°C – 70°C) Rel. humidity: 20% – 80%, non-condensing
Approvals	FCC (Class B), CE (Class B), RoHS2 (CE)

Part numbers

CLK-2U2TPB-100M/FP	CrystalLink USB2.0 Dual-Port extender kit, Transmitter, Receiver, and power supply
RM-UD/CLKU2F	Shelf, wall, or under desk bracket
CAB-USBAB005	USB-AB cable, 6ft (2.0m)
CAB-USBAB010	USB-AB cable, 10ft (3.0m)



Transmitter front



Transmitter back



Receiver front



Receiver back

WWW.ROSE.COM ▪ **sales@rose.com** ▪ **(800) 333-9343**

Rose Electronics ▪ 10707 Stancliff Road ▪ Houston, Texas 77099
Rose USA (281) 933-7673 ▪ Rose Europe +49 (0) 2454 969442
Rose Asia +65 6324 2322 ▪ Rose Australia +61 (0) 421 247083

datasheet-crystallink-usb2.0-cabx-dual-port-revb-2018-02-27

 **ROSE**
ELECTRONICS
WWW.ROSE.COM